



sdp **INCH** Stepper Motors - NEMA Size 23

■ 1.8° STEP ANGLE

■ SINGLE OR DOUBLE ENDED SHAFTS

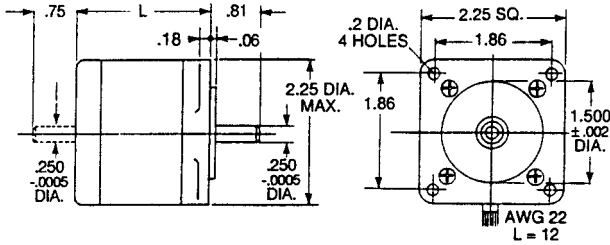


| Catalog Number* | Holding Torque oz. in. | Detent Torque oz. in. | Phase Current amps | | Phase Inductance mH ±20% | Phase Resistance ohms ±10% | Rotor Inertia oz. in. ² | No. of Leads | L Length in. | Weight lbs. |
|--------------------------------------|------------------------|-----------------------|--------------------|---------|--------------------------|----------------------------|------------------------------------|--------------|--------------|-------------|
| | | | Unipolar | Bipolar | | | | | | |
| D34D62-2215033A4 D34D62-2215033B4 | 36 | 5 | — | .33 | 57 | 33 | .28 | 4 | 1.5 | .75 |
| D34D62-2215150A8 D34D62-2215150B8 | 26 | 4 | 1.5 | 2.2 | 1.6 | 1.5 | .28 | 8 | 1.5 | .75 |
| D34D62-2220100A8 D34D62-2220100B8 | 54 | 5 | 1 | 1.4 | 9.5 | 5 | .63 | 8 | 2 | 1.1 |
| D34D62-2232470A8 D34D62-2232470B8 | 114 | 10 | 4.7 | 6.6 | .8 | .37 | 1.26 | 8 | 3.2 | 2.1 |
| D34D62-2240460A8 D34D62-2240460B8 | 142 | 14 | 4.6 | 6.5 | 1.2 | .48 | 1.8 | 8 | 4 | 2.2 |


*NOTE: Catalog Numbers with the letter **A** represent **single shaft** stepper motors, **B** denotes **double shaft**.

SPEED vs. TORQUE CHARACTERISTICS

Charts available for all part numbers upon request.

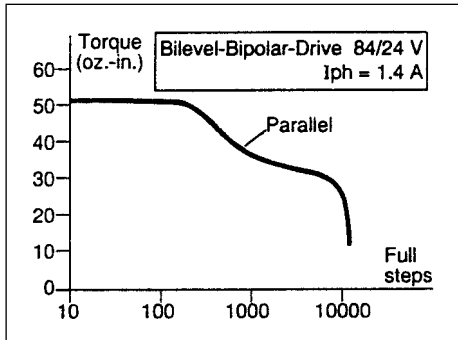

D34D62-2220100A8

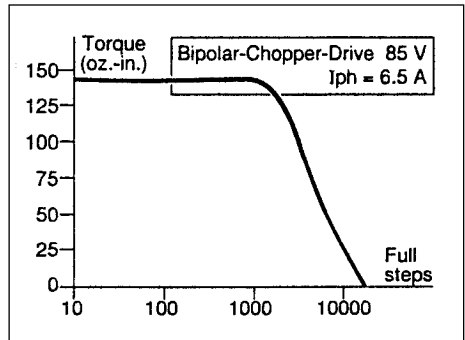

D34D62-2240460A8